

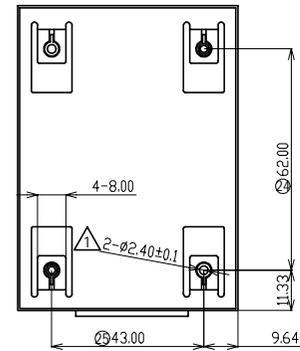
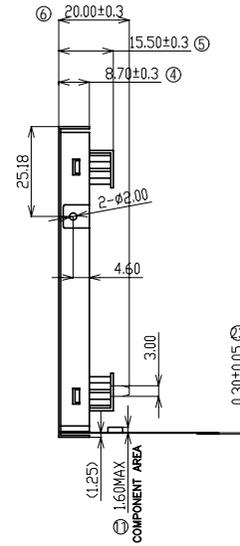

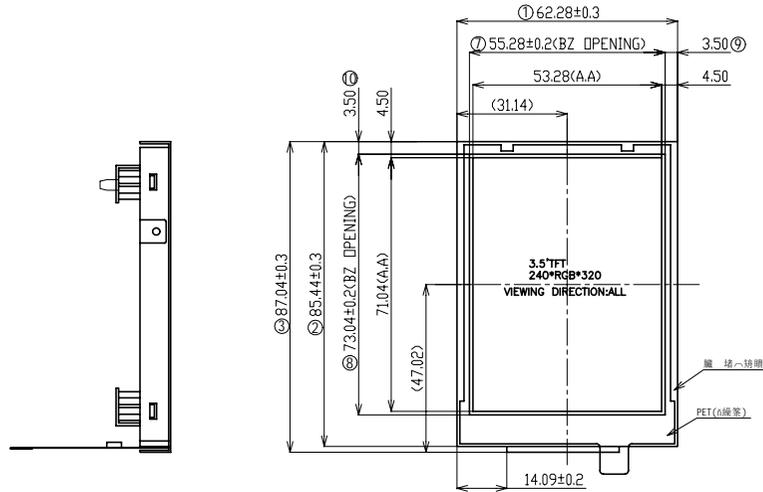


Customer Approved

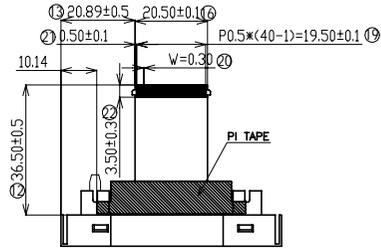

背光電路:



VER	CHANG CONTENT	DATA
VO	FIRST EDITION	2018.06.06
V1	ADD HOLE SIZE.	2018.08.18

PIN	Symbol
1	NC
2	GND
3	ENABLE
4	DOTCLK
5	VSYNC
6	GND
7	HSYNC
8	IMO
9	IM1
10	IM2
11	IOVCC
12	VCC
13	SDI
14	SDO
15	DB17
16	DB16
17	DB15
18	DB14
19	DB13
20	DB12
21	DB11
22	DB10
23	DB09
24	DB08
25	DB07
26	DB06
27	DB05
28	DB04
29	DB03
30	DB02
31	DB01
32	DB00
33	RESET
34	RD
35	RS/SCL
36	WR
37	CS
38	LEDK
39	LEDA
40	NC

DISPLAY TYPE:	3.5" TFT	DIPALY DRIVER:		PIXEL SIZE:	0.222 X 0.222 mm	產品型號:	SNFO35004ANN				
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-30°C TO +85°C	BACK LIGHT:	LED WHITE(X6),2串3并	部品型號:	LCM外形圖	核准:			
VIEWING DIRECTION:	ALL VIEW	STORAGE TEMP:	-40°C TO +90°C			版本:	V1	單位:	mm	審核:	
DOT MATRIX:	240(RGB)X320 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST	日期:	2018.06.13	比例:	1:1	設計:	謝鳳嬌



旭璟光電科技(惠州)有限公司
SUN VIEW TECH. CO., LTD

第三視角:



UNMARKED TOLERANCE: ±0.20 mm

頁碼:

1 OF 1