


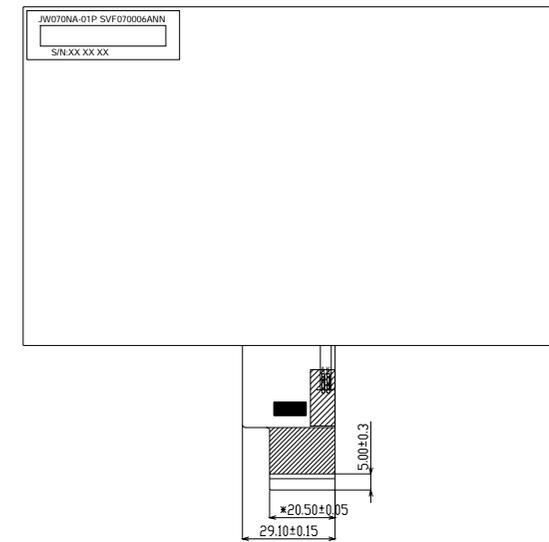


Customer Approved

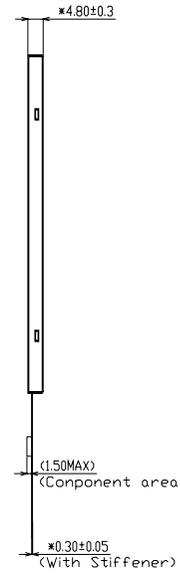

VER	CHANG CONTENT	DATA
VO	FIRST EDITION	2017.06.19
V1	MODIFY DRIVER IC	2017.09.28
V2	MODIFY INSULATION TAPE	2017.10.23
V3	增加重點尺寸標示	2018.12.05

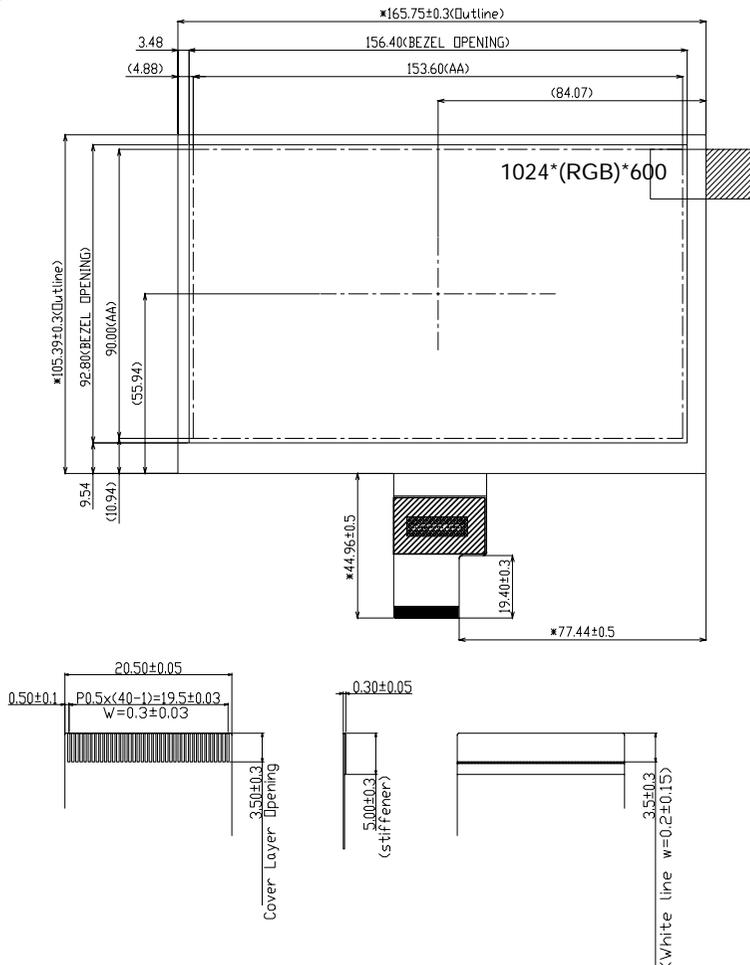


Vf=9.9V<TYP>, If=360mA<TYP>

PIN	Symbol
1	VCOM
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	DIMO
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	CABCEN1
37	CABCEN0
38	VGH
39	LED+
40	LED+

DISPLAY TYPE:	7.0" TFT	DIPALY DRIVER:	EK79001+EK73001	PIXEL PITCH:	0.0641 X 0.1784 mm	產品型號:	SVF070006ANN				
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-30°C TO +80°C	BACK LIGHT:	LED WHITE(X18),3串6并	部品型號:	LCM外形圖		核准:		
VIEWING DIRECTION:	6 O'CLOCK	STORAGE TEMP:	-30°C TO +85°C			版本:	V3	單位:	mm	審核:	
DOT MATRIX:	1024(RGB)X600 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST	日期:	2017.07.04	比例:	1:1	設計:	謝鳳嬌



旭璟光電科技(惠州)有限公司  
SUN VIEW TECH. CO., LTD



UNMARKED TOLERANCE: ±0.30 mm

頁碼: 1 OF 1