

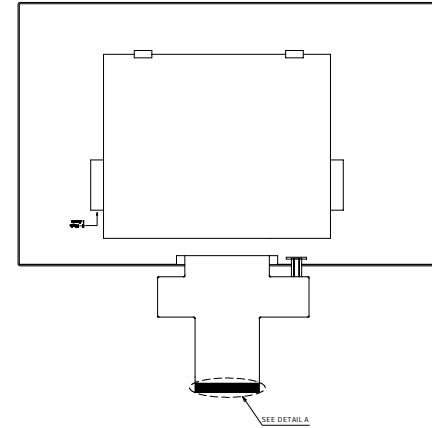
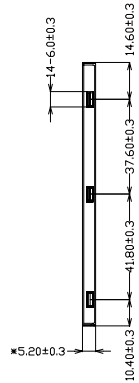
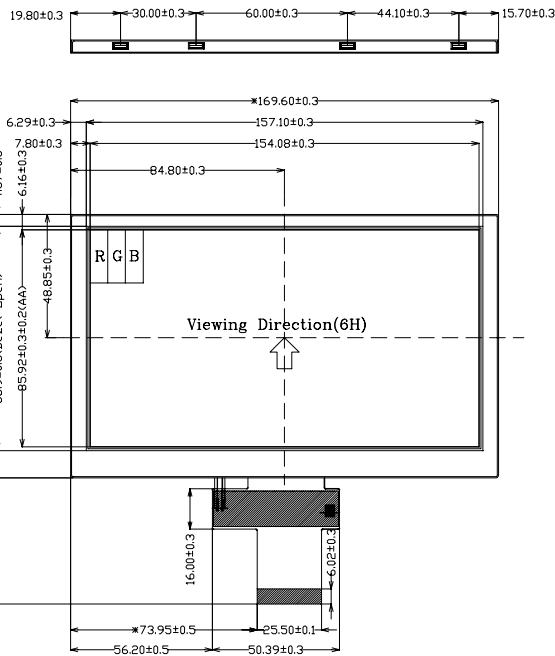



VER	CHANG CONTENT	DATA
VO	FIRST EDITION	2015.04.27



PIN	Symbol
1	LED+
2	LED-
3	GND
4	VCOM
5	DVDD
6	RESET
7	SHLR
8	UPDN
9	DTH
10	MODE
11	R0
12	R1
13	R2
14	R3
15	R4
16	R5
17	R6
18	R7
19	GND
20	G0
21	G1
22	G2
23	G3
24	G4
25	G5
26	G6
27	G7
28	GND
29	B0
30	B1
31	B2
32	B3
33	B4
34	B5
35	B6
36	B7
37	GND
38	DCLK
39	DEN
40	VSD
41	HSD
42	GND
43	AVDD
44	GND
45	BIST
46	GND
47	VGH
48	VGL
49	STBYB
50	GND



Vf=18V(TYP). If=60mA(TYP)




DETAIL A  
SCALE 2:1

DISPLAY TYPE:	7.0" TFT	DIPALY DRIVER:		PIXEL SIZE:	0.1926 X 0.1780 mm	產品型號:	SVF070010ANN				
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20° C TO +70° C	BACK LIGHT:	LED WHITE(X18), 6串3并	部品型號:	LCM外形圖		核准:		
VIEWING DIRECTION:	6 O' CLOCK	STORAGE TEMP:	-30° C TO +80° C			版本:	VO	單位:	mm	審核:	
DOT MATRIX:	800(RGB)X480 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST	日期:	2018.09.03	比例:	1:1	設計:	謝鳳嬌



旭璟光電科技(惠州)有限公司  
SUN VIEW TECH. CO., LTD

第三視角:



UNMARKED TOLERANCE: ±0.20 mm

頁碼:

1 OF 1