



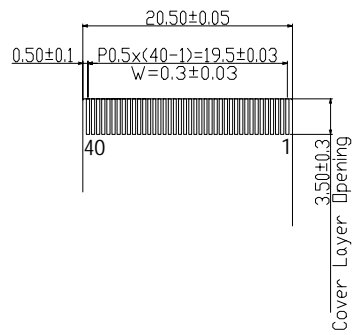
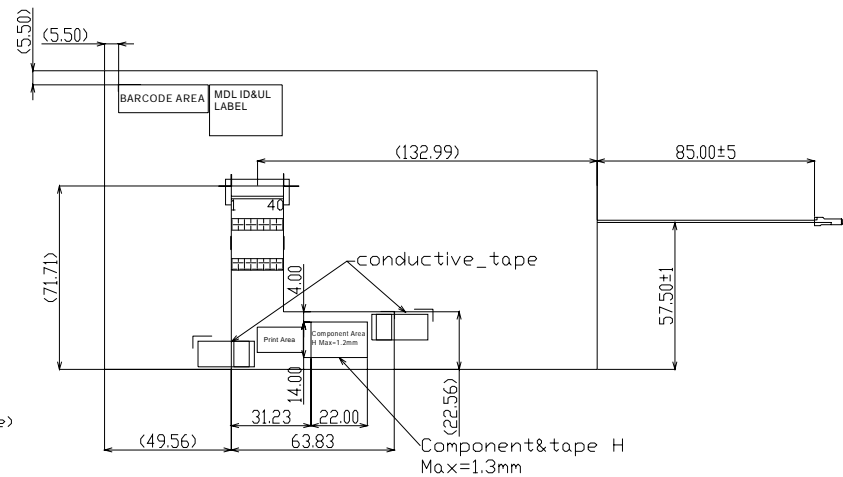


Customer Approved


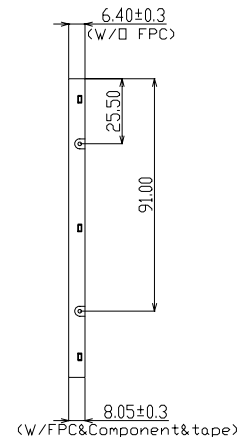


VER	CHANG CONTENT	DATA
VO	FIRST EDITION	2017.06.19

PIN	Symbol
1	VCOM
2	DVDD
3	DVDD
4	NC
5	RESET
6	UPDN
7	SHLR
8	STBYB
9	GND
10	NINC
11	PINC
12	GND
13	NINDO
14	PINDO
15	GND
16	NIND1
17	PIND1
18	GND
19	NIND2
20	PIND2
21	GND
22	NIND3
23	PIND3
24	GND
25	SELB
26	GND
27	AVDD
28	GND
29	VGH
30	NC
31	NC
32	VGL
33	GND
34	NC
35	NC
36	NC
37	NC
38	NC
39	NC
40	NC

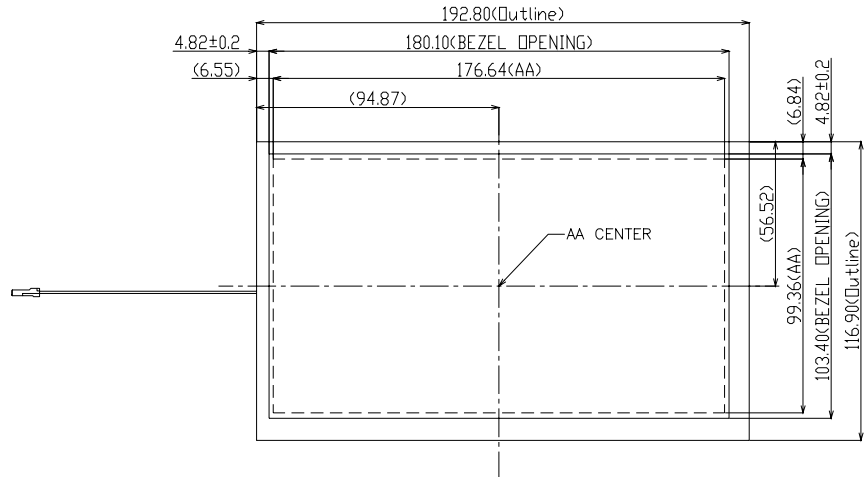


SCALE:4:1

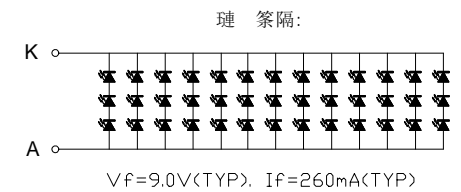

DISPLAY TYPE:	8.0" TFT	DIPALY DRIVER:	HX8282+HX8696	PIXEL PITCH:	0.0575 X 0.1656 mm	產品型號:	SVF080001ANN				
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-30°C TO +80°C	BACK LIGHT:	LED WHITE(X39),3=13	部品型號:	LCM模組圖		核準:		
VIEWING DIRECTION:	6 O'CLOCK	STORAGE TEMP:	-30°C TO +85°C			版本:	VO	單位:	mm	審核:	
DOT MATRIX:	1024(RGB)X600 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST	日期:	2017.06.20	比例:	1:1	設計:	謝鳳嬌

旭璟光電科技 (惠州) 有限公司  
SUN VIEW TECH. CO., LTD



UNMARKED TOLERANCE: ±0.30 mm

頁碼: 1 OF 1