

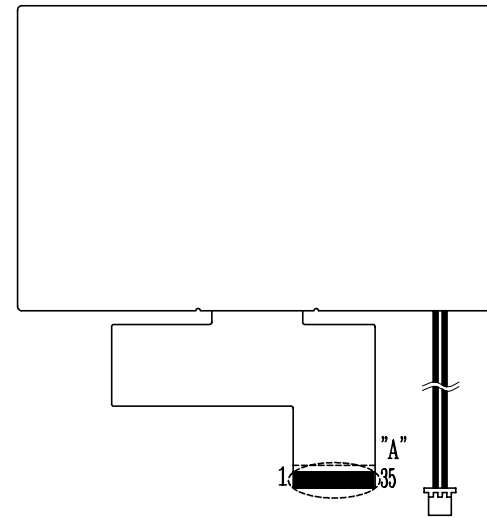
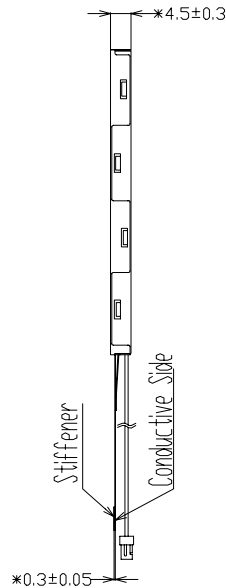
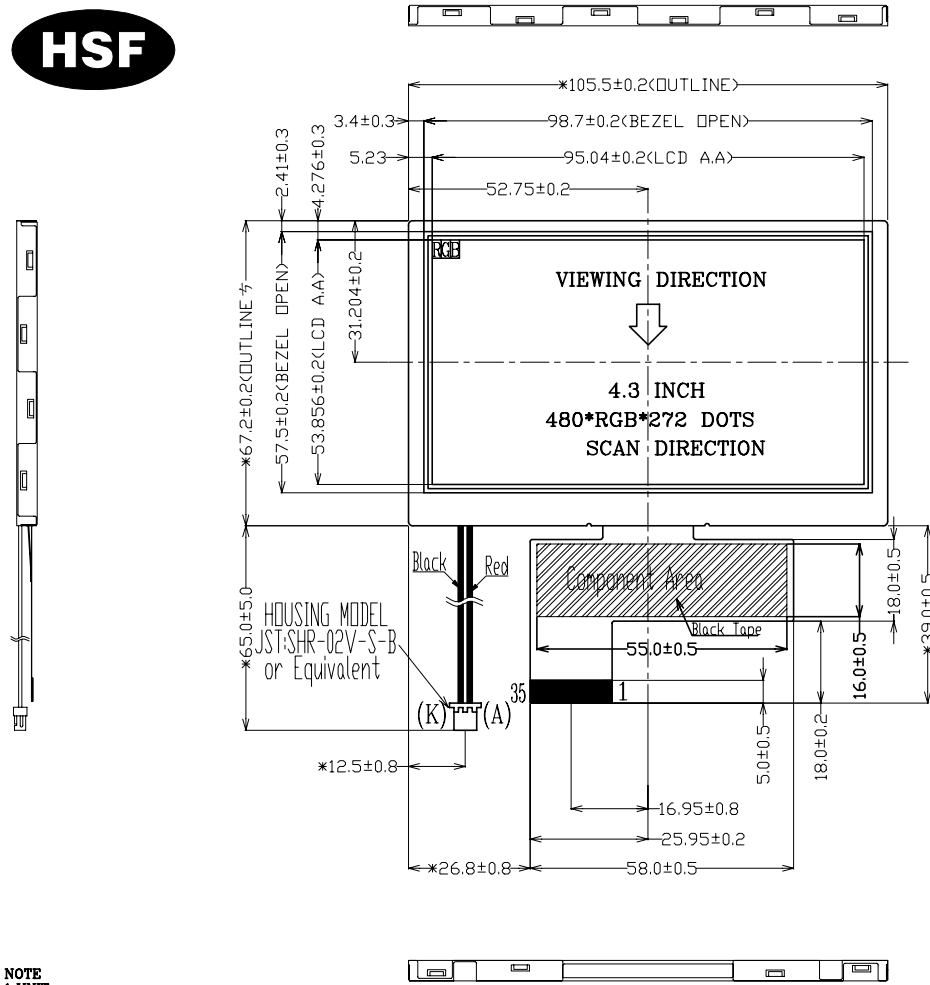


VER	CHANG CONTENT	DATA
VO	FIRST EDITION	2015.04.08
V1	修改PIN表及增加TAPE尺寸標注。	2015.04.30
V2	加標重點尺寸標示	2018.11.14

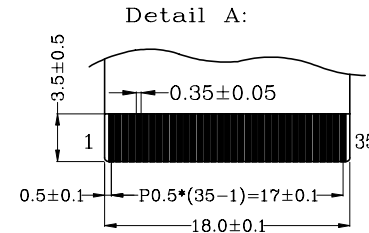

PIN	Symbol
1	GND
2	R0
3	R1
4	R2
5	R3
6	R4
7	R5
8	R6
9	GND
10	G1
11	G2
12	G3
13	G4
14	G5
15	GND
16	B0
17	B1
18	B2
19	B3
20	B4
21	B5
22	GND
23	DCLK
24	VDD
25	VDD
26	VDD
27	VDD
28	DE
29	HSYNC
30	VSYNC
31	NC
32	NC
33	GND
34	GND
35	GND


NOTE  
1. UNIT:mm  
2. SCALE NTS



DISPLAY TYPE:	4.3" TFT	DIPALY DRIVER:	HX8257	PIXEL SIZE:	0.198 X 0.198 mm	產品型號:	SVT043001ANN				
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X9), 9串1并	部品型號:	LCM外形圖		核准:		
VIEWING DIRECTION:	12 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C			版本:	V2	單位:	mm	審核:	
DOT MATRIX:	480(RGB)X272 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST	日期:	2015.04.30	比例:	1:1	設計:	謝鳳嬌



旭璟光電科技(惠州)有限公司  
SUN VIEW TECH. CO., LTD



UNMARKED TOLERANCE: ±0.20 mm

頁碼:

1 OF 1