

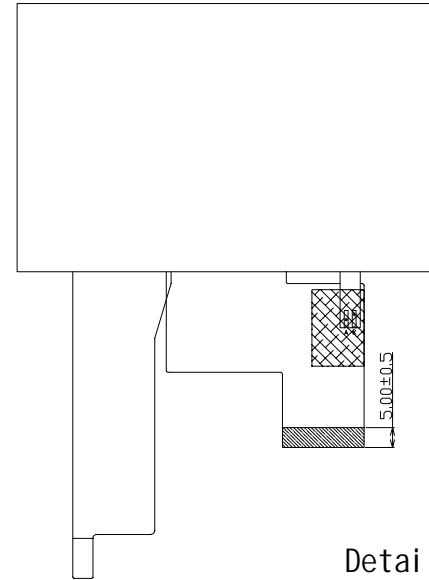
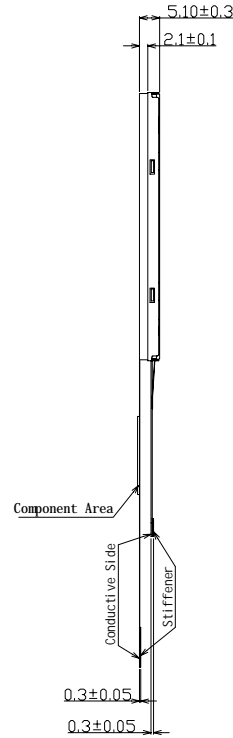
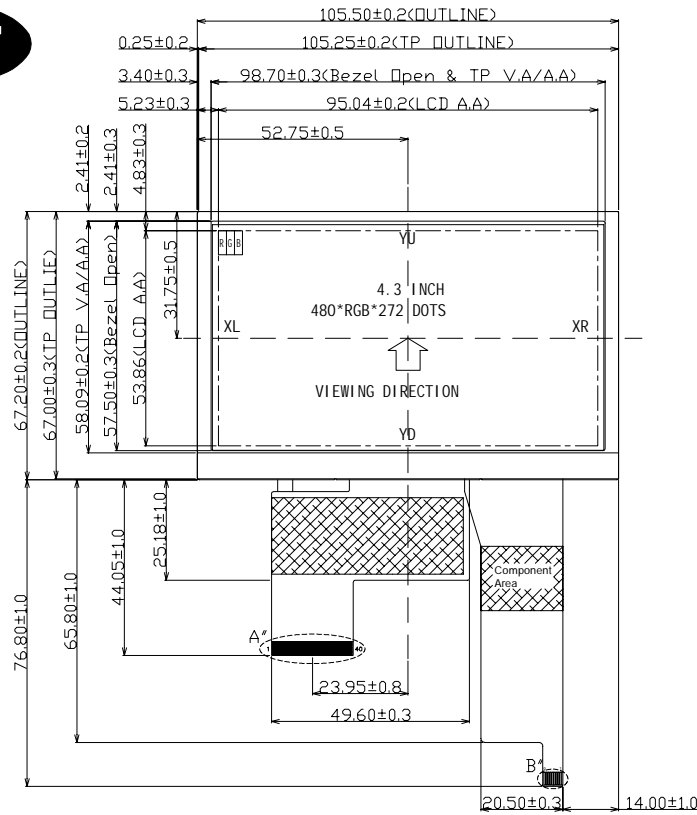



Customer Approved

VER	CHANG CONTENT	DATA
V0	FIRST EDITION	2018.09.05



PIN	Symbol
1	LED-
2	LED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISD
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

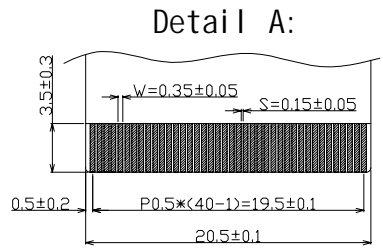


NOTE: (1) UNIT : mm
(2) SCALE : NTS

DISPLAY TYPE:	4.3" TFT	DIPALY DRIVER:		PIXEL PITCH:	0.198 X 0.198 mm	產品型號:	SVF043006ANC				
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X63串3并)	部品型號:	LCM外形圖		核准:		
VIEWING DIRECTION:	6 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C			版本:	V0	單位:	mm	審核:	
DOT MATRIX:	480(RGB)X272 DOTS	STRUCTURE:	LCD+IC+FPC+BL+CTP	MATERIAL NOTE	ROHS REQUEST	日期:	2018.09.05	比例:	1:1	設計:	謝鳳嬌



旭璟光電科技(惠州)有限公司
SUN VIEW TECH. CO., LTD



UNMARKED TOLERANCE: ±0.30 mm

頁碼: 1 OF 1