




Customer Approved

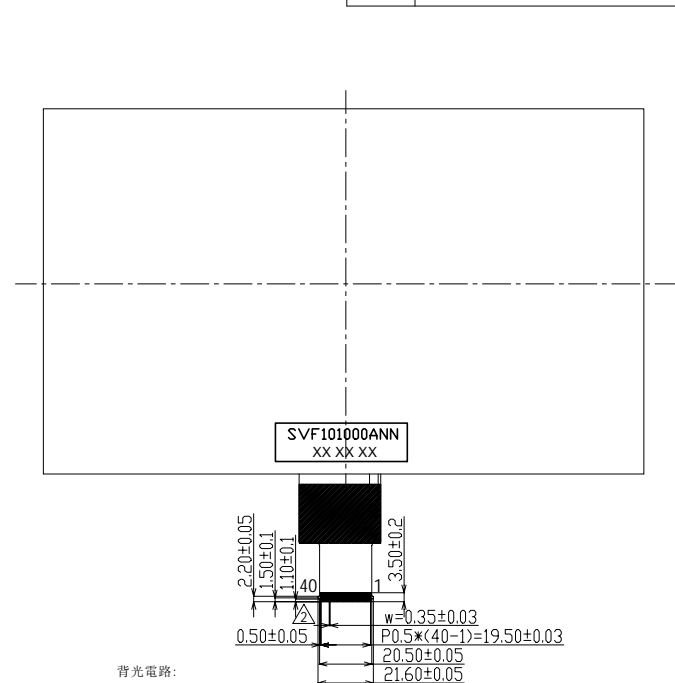

VER	CHANG CONTENT	DATA
V0	FIRST EDITION	2017.03.03
V1	Modify thickness size.	2017.05.09
V2	Modify stiffener and gold pad.	2017.06.23
V3	增加重點尺寸標示	2018.11.16

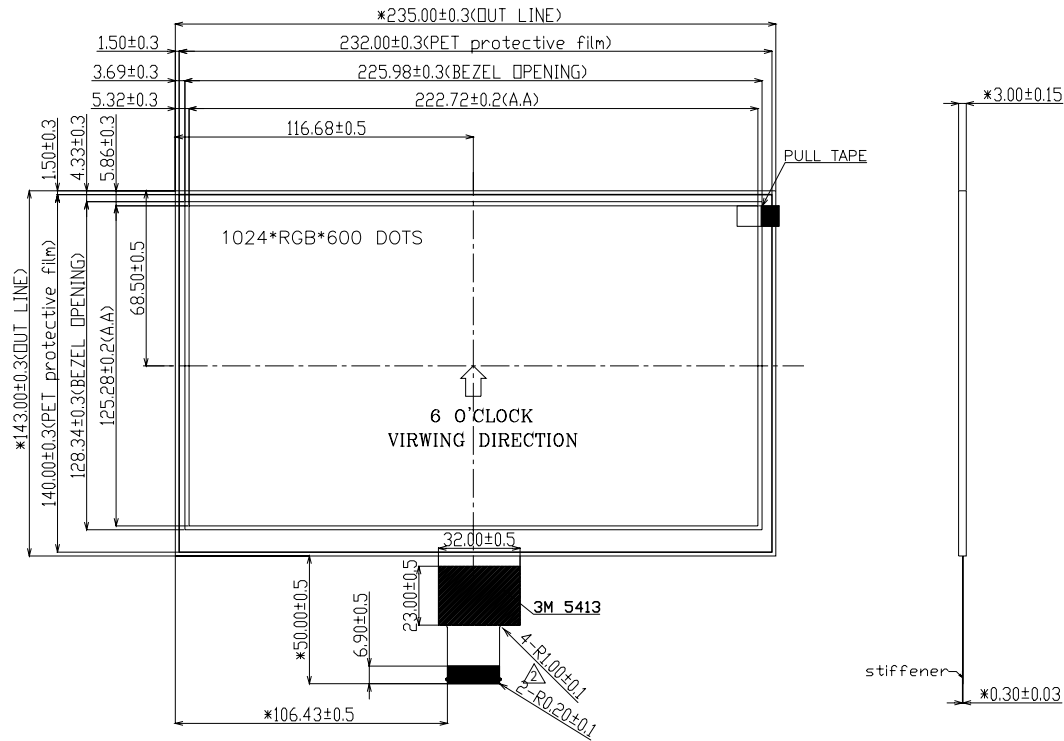

PIN	Symbol
1	VCOM
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	Rin0-
9	Rin0+
10	GND
11	Rin1-
12	Rin1+
13	GND
14	Rin2-
15	Rin2+
16	GND
17	RelkIN-
18	RelkIN+
19	GND
20	Rin3-
21	Rin3+
22	GND
23	NC
24	NC
25	GND
26	Bist
27	NC
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	NC
37	NC
38	VGH
39	LED+
40	LED+




Vf=9.6V(TYP). If=100~160mA

INSULATION TAPE

DISPLAY TYPE:	10.1" TFT	DIPALY DRIVER:	HX8282+HX8696	PIXEL SIZE:	0.2175 X 0.2088 mm	產品型號:	SVF101000ANN				
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	0°C TO +50°C	BACK LIGHT:	LED WHITE(X24),3串8并	部品型號:	LCM外形圖		核准:		
VIEWING DIRECTION:	6 O'CLOCK	STORAGE TEMP:	-20°C TO +60°C			版本:	V3	單位:	mm	審核:	
DOT MATRIX:	1024(RGB)X600 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST	日期:	2017.03.03	比例:	1:1	設計:	謝鳳嬌



旭璟光電科技(惠州)有限公司  
SUN VIEW TECH. CO., LTD



UNMARKED TOLERANCE:  $\pm 0.20$  mm

頁碼: 1 OF 1