

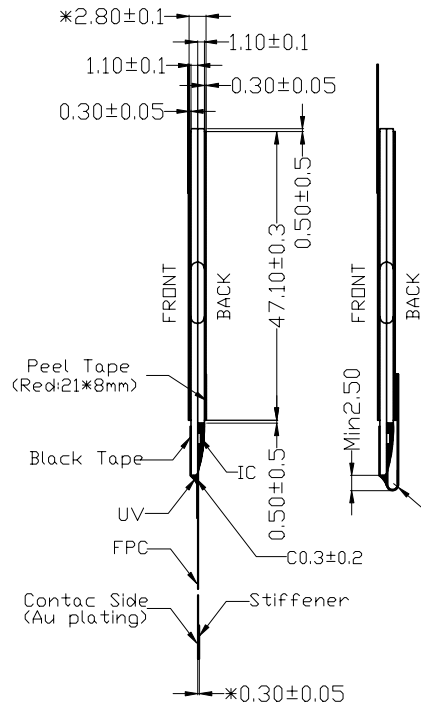




HSF

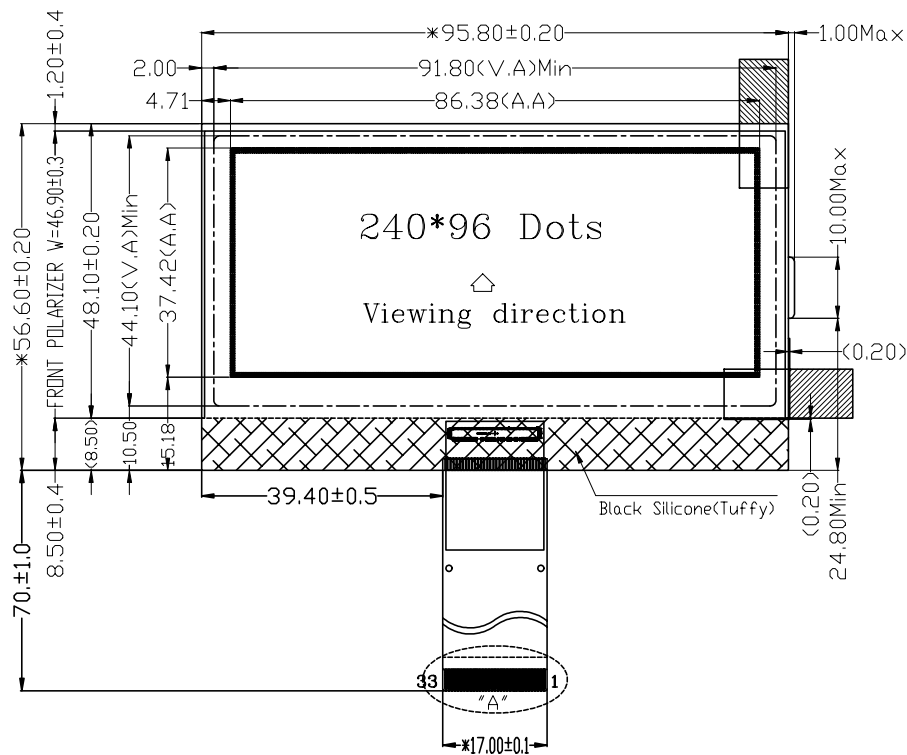

DOT SIZE
Scale 20:1

PIN Interface

PIN	NAME	PIN	NAME
1	VSS(ESD)	18	DB7
2	NC	19	DB6
3	VB1-	20	DB5
4	VB1-	21	DB4
5	VB1+	22	DB3
6	VB1+	23	DB2
7	VB0-	24	DB1
8	VB0-	25	DB0
9	VB0+	26	RD(WRI)
10	VB0+	27	WR
11	VLCD	28	CD
12	VLCD	29	RST
13	VBAIS	30	CS
14	VSS	31	BM0
15	VSS	32	BM1
16	VDD	33	VSS(ESD)
17	VDD	34	

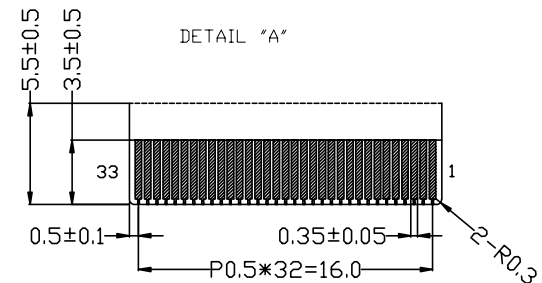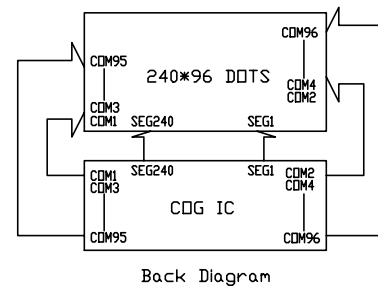

SPECIFICATION:

- 1) Driving conditions: Duty: 1/96, Bias: 1/12, Vdd: 3.0V, Vop: 14.3V;
- 2) Viewing direction: 6 o'clock;
- 3) Display mode: FSTN, Positive, Transflective;
- 4) Operating temp: -10~60° C;
Storage temp: -20~70° C;
- 5) IC: UC1608;
- 6) Material of stiffener: PI(Coffee);
- 7) Customer: Nakayo;
- 8) Dimensions with asterisk "*" are importance, with bracket "()" are for reference;
- 9) RoHS Compliant.

REVISES CONTENT		SUN-VIEW TECHNOLOGY CO., LTD						
03	增加Tuffy	CUSTOM					PROJECTION	
		DRAWING BY	沈光娥	2016.04.27	ITEM	MD	UNITS	mm
		CHECKED BY			CODE	MD090615003-2	SCALE	
		APPROVED BY			MODEL	SVG240096AWNC	SHEET	1 OF 5